


CRE Product Range

Range	CRE 1	CRE 3	CRE 5	CRE 10	CRE 15	CRE 20	CRE 32	CRE 45	CRE 64
Nominal flow rate (US GPM)	8.5	15	30	55	95	110	140	220	340
Temperature range (°F)	-4 to +250						-22 to +250		
Temperature range (°F) - on request	-40 to +356						-40 to +356		
Max. pump efficiency (%)	49	59	67	70	72	73	76	78	79
CRE pumps:									
Flow range (US GPM)	0 - 12.8	0 - 23.8	0 - 45	0 - 70	0 - 125	0 - 155	0 - 210	0 - 310	0 - 450
Max. pump pressure (H[ft])	790	790	780	665	390	270	240	120	100
Motor power (HP)	1/2 - 3	1/2 - 5	3/4 - 7 1/2	3/4 - 10	2 - 10	3 - 10	3 - 10	7 1/2 - 10	7 1/2 - 10
Version:									
CRE: Cast Iron and stainless steel AISI 304	•	•	•	•	•	•	•	•	•
CRIE: Stainless steel AISI 304	•	•	•	•	•	•	-	-	-
CRNE: Stainless steel AISI 316	•	•	•	•	•	•	•	•	•
CRTE: Titanium	-	(CRTE 2)	(CRTE 4)	(CRTE 8)	(CRTE 16)	-	-	-	-

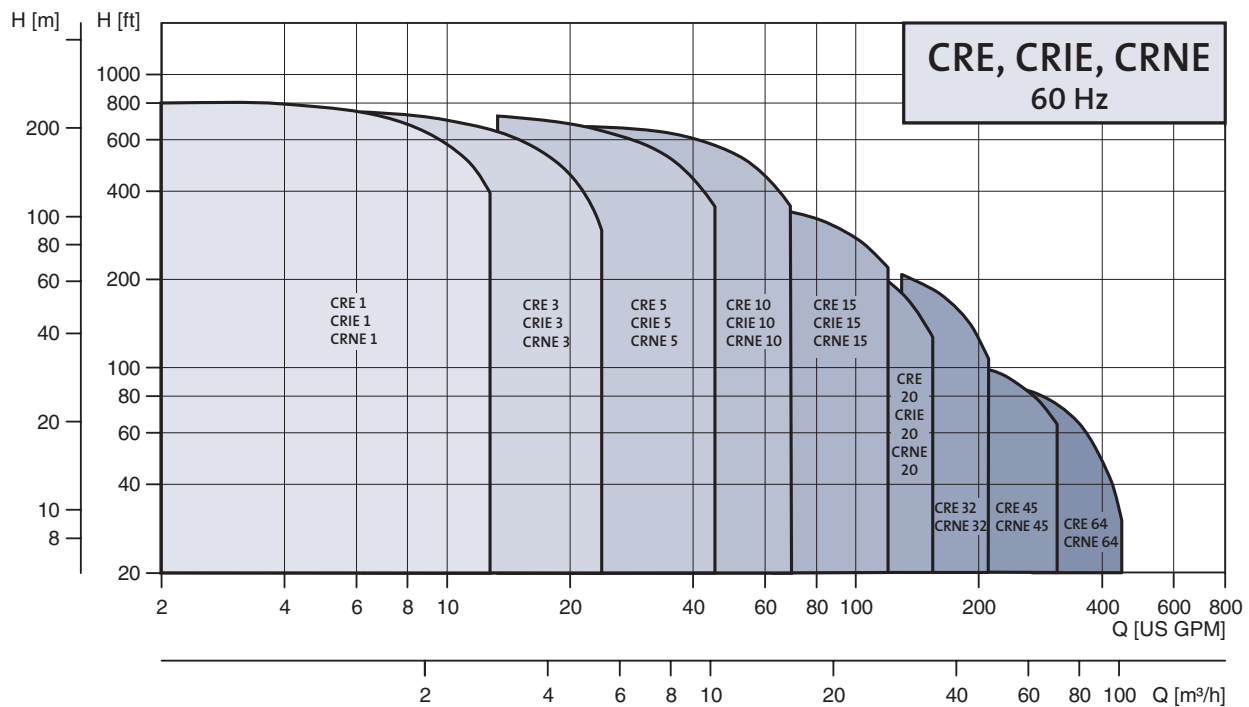

TK00 CRE1 0104