


## Type key

Example	UP	S	15	-58	()	F	C
Circulator pump							
S: 3 speed							
10: Comfort series							
15: Small stator UP							
25, 26, 43, 50: Large stator UP							
Maximum head [dm]							
Pump housing							
= Cast iron (no letter = cast iron)							
S = Stainless steel							
B = Bronze							
Pipe connection							
F = Flange							
FR = Flange rotated 90°							
U = Union connection							
5 = 1/2" internal sweat							
7 = 3/4" internal sweat							
N = NPT female thread fitting							
7P = 3/4" male x female connection							
Special features							
/T = Timer							
/LC = Line cord							
/VS = Variable speed control							
/MR = Mixing reset control							
A = Thermostat (Aquastat)							
C = Check valve (integrated into discharge)							

## Nameplate

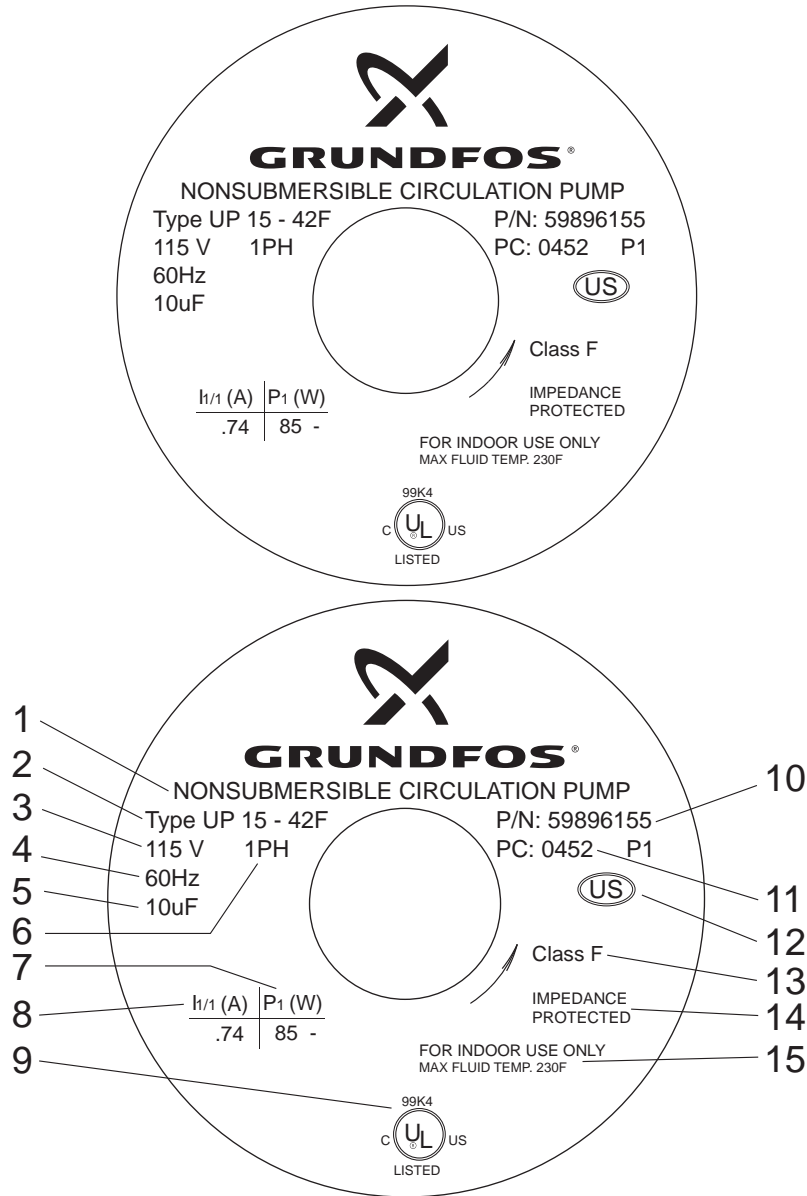

TM03 8595 2007

Fig. 1 Nameplate

Pos.	Description
1	Non-submersible pump
2	Pump type, UP 15-42F
3	Voltage, 115 V
4	Frequency, 60 Hz
5	Capacitor, 10 μF
6	1-phase
7	Power, 85 W
8	Current, 0.74 A

Pos.	Description
9	Approval
10	Product number, P/N: 59896155
11	04 = year 2004 / 52 = week
12	US approval
13	Isolation, Class F
14	Impedance-protected
15	Maximum liquid temperature, 230° F